


STANDARD SPECIFICATION

| Model | CW 26 370 | | CW 26 410 | |
|--|---|-----------------------|---------------------------------|-----------------------|
| Model Description | 6x4 Freight Cargo 270 kW | | 6x4 Freight Cargo 300 kW | |
| | Short Wheelbase | Long Wheelbase | Short Wheelbase | Long Wheelbase |
| Manufacturer's Code | CWB6BLPHNN/CWB6BLPHLN | CWB6BLSHNN/CWB6BLSHLN | CWB6BLPHNP/CWB6BLPHLP | CWB6BLSHNP/CWB6BLSHLP |
| Steering Position | RH/LH | | | |
| Drive System | 6x4 | | | |
| Weights | | | | |
| GVW (kg) | 26,000 | | | |
| Front Axle Capacity (kg) | 6,500 | | | |
| Rear Axle Capacity (kg) | 21,000 | | | |
| Chassis with Cab (kg) | 8,395 | 8,470 | 8,485 | 8,555 |
| On Front Wheels (kg) | 4,460 | 4,485 | 4,530 | 4,555 |
| On Rear Wheels (kg) | 3,935 | 3,985 | 3,955 | 4,000 |
| Dimensions | | | | |
| Wheelbase (WB) (mm) | 5,265 | 5,765 | 5,265 | 5,765 |
| Overall Length (OL) (mm) | 10,105 | 10,925 | 10,105 | 10,925 |
| Overall Width (OW) (mm) | 2,490 | | | |
| Overall Height (OH) (mm) | 2,960 | | | |
| Front Tread (FT) (mm) | 2,025 | | | |
| Rear Tread (RT) (mm) | 1,835 | | | |
| Rear Overhang to Frame End (ROF) (mm) | 3,320 | 3,640 | 3,320 | 3,640 |
| Cab back to Rear Axle Center (CA) (mm) | 4,535 | 5,035 | 4,535 | 5,035 |
| Minimum Turning Radius (m) | 9.5 | 10.3 | 9.5 | 10.3 |
| Engine | | | | |
| Model | UD Trucks GH13 (EURO3) | | | |
| Type | Direct injection, water cooled, in-line 6-cylinder diesel engine, turbocharged with intercooler | | | |
| Fuel System | Direct injection, unit injector | | | |
| Displacement (cm ³) | 12,777 | | | |
| Bore x Stroke (mm) | 131x158 | | | |
| Output | 270 kW (362 HP)/1,500-1,800 rpm | | 300 kW (402 HP)/1,400-1,800 rpm | |
| Torque | 1,754 Nm/950-1,450 rpm | | 2,040 Nm/1,050-1,400 rpm | |
| Engine Brake | Exhaust Brake (Optional: Extra Engine Brake 290 kW/2,300 rpm) | | | |
| Brake System | | | | |
| Service Brake | Full air, dual air line system, wedge type | | | |
| Parking Brake | Spring brakes fitted on the rear-front axle and rear-rear axle | | | |
| Transmission & Others | | | | |
| Model | UD Trucks MTS75D (Optional: UD Trucks MPR90A) | | UD Trucks MRT25B | |
| Type | 7-speed manual (9-speed manual) | | 12-speed manual | |
| Final Ratio | 5.143 (4.333) | | 3.727 | |
| Tire | 10.00R20 | | | |
| Max. Speed (km/h) | 124 (124) | | 133 | |
| Max. Gradeability (tanθat GVW 26,000 kg) | 0.433 (0.591) | | 0.636 | |
| Clutch | Dry single plate, 430 mm diameter hydraulically operated | | | |
| Fuel Tank Capacity (liter) | 200 (Optional: 300, 400, 600) | | | |

Dimensions and weights are calculated under standard specifications.
The weights include oil, coolant and fuel, exclude tools and spare wheel.

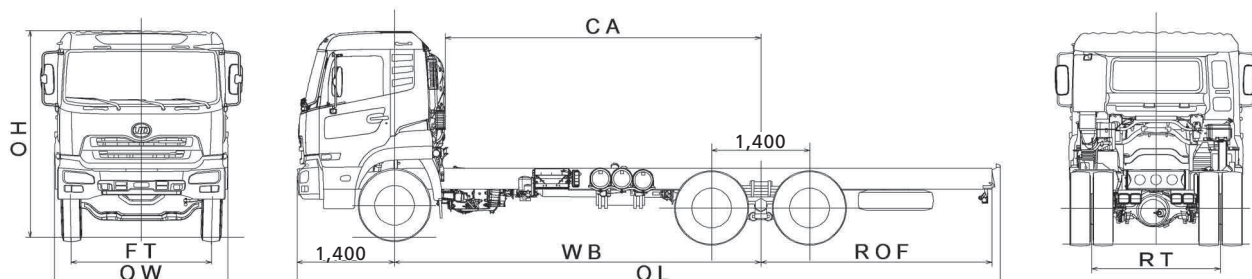

TRANSMISSION

| Model | | UD TRUCKS MTS75D | UD TRUCKS MPR90A | UD TRUCKS MRT25B | |
|-------------|------|--|---|---|--------|
| Type | | Seven forward speeds and one reverse, synchromesh on 2nd to 7th gears, constantmesh on 1st and reverse gears | Nine forward speeds and one reverse, synchromesh on 2nd to 9th and reverse gear, constantmesh on 1st gear | Twelve forward speeds and two reverses, synchromesh on forward gears, constantmesh on reverse gears | |
| Gear Ratios | | | | (LOW) | (HIGH) |
| | 1st | 6.710 | 10.164 | 10.278 | 8.336 |
| | 2nd | 4.442 | 6.582 | 6.298 | 5.108 |
| | 3rd | 2.458 | 4.673 | 3.649 | 2.959 |
| | 4th | 1.459 | 3.388 | 2.236 | 1.813 |
| | 5th | 1.000 | 2.544 | 1.464 | 1.187 |
| | 6th | 0.758 | 1.942 | 1.000 | 0.811 |
| | 7th | 0.633 | 1.379 | - | - |
| | 8th | - | 1.000 | - | - |
| | 9th | - | 0.751 | - | - |
| | Rev. | 6.710 | 10.164 | 9.160 | 7.429 |
| Gear Shift | | Mechanical remote control with power assistance | | | |

FINAL RATIO

| Transmission Model | UD TRUCKS MTS75D | UD TRUCKS MPR90A | UD TRUCKS MRT25B |
|--|------------------|------------------|------------------|
| Final Ratio by Transmission *Standard Ratio | 4.875 | 4.111 | 3.545 |
| | 5.143* | 4.333* | 3.727* |
| | 5.571 | 4.625 | 4.111 |
| | 5.857 | 4.875 | 4.333 |

PTO

| Transmission Model | UD TRUCKS MTS75D | UD TRUCKS MPR90A | UD TRUCKS MRT25B |
|--------------------|------------------|------------------|----------------------|
| Output Torque 1 | 490 Nm | | |
| Reduction Ratio | 1.118 | 1.071 | L: 1.189 H: 0.965 |
| Output Torque 2 | 981 Nm | | |
| Reduction Ratio | 0.990 | | |

FEATURES

| Item | | CW 26 370 / CW 26 410 | Notes |
|-------------------|--------------------------------|-----------------------|--|
| Cabin Interior | Power Windows | Standard | For both driver and assistant seat |
| | Cigarette Lighter | Standard | 24 v type |
| | Curtain Rail (Bed Room only) | Standard | |
| | Curtain | Optional | |
| | Carpet (Cloth) | Optional | Standard spec is Vinyl |
| | Center Console Box | Optional | Limited for 2 passengers |
| | Center Seat | Optional | For 3 passengers |
| | Driver's Seat - Air Suspension | Optional | |
| | Sunvisor for Assistant Seat | Optional | Driver's seat sunvisor is included in standard |
| | Center Door Lock | Optional | |
| | Air Conditioner | Optional | |
| | Radio | Optional | |
| | Radio and CD Player | Optional | |
| | Speed Limiter | Optional | Three versions: 80 km/h, 90 km/h, 100 km/h |
| Tachograph | Optional | | |
| Fire Extinguisher | Optional | | |
| Cabin Exterior | Fog Lamp | Standard | White color light |
| | Rotary Beacon Lamp | Optional | Yellow color light |
| | Front Air Dam Bumper | Optional | |
| | Radiator Protector | Optional | Front under cover |
| | Rear View Combination Mirrors | Optional | |
| Chassis | Fuel Tank Capacity 300-liter | Optional | Main tank 300-liter |
| | Fuel Tank Capacity 400-liter | Optional | Main tank 200-liter + sub tank 200-liter |
| | Fuel Tank Capacity 600-liter | Optional | Main tank 300-liter + sub tank 300-liter |
| | Fuel Tank Cap with Key | Optional | |
| | Tool Box | Optional | |
| Tire Inflator | Optional | | |

Specifications and options may differ depending on each country due to regulations or special requirements. Dimensions and devices may be changed without prior notice. Please contact your nearest UD Trucks dealer for further details.